



Najszerza
oferta
pneumatyki
w Polsce




Szybka dostawa
24 h / 48 h



Biuro Obsługi Klienta
+48 71 799 45 81

Przetwornik położenia, magnetostrykcyjny, liniowy o podwyższonej odporności na warunki atmosferyczne, seria BTL (BTL10E3) - Balluff

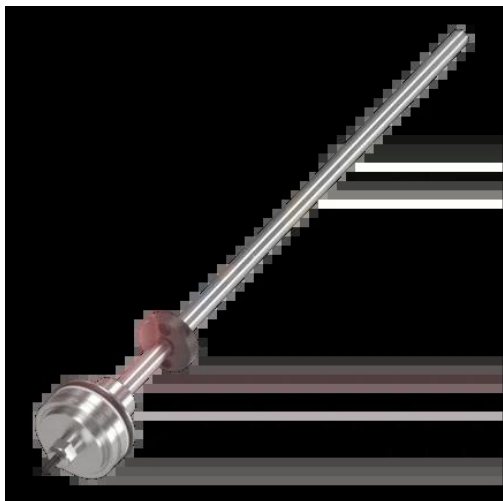

Numer artykułu SKU:
OC-BALLUFF005006

Numer artykułu producenta:

Tylko na zamówienie

BALLUFF

OPIS PRODUKTU

Charakterystyka

BTL10E3 (BTL6-E500-M0716-E2-SA313-LA00,19-ZA0T) -	1,522.75 USD - Style: Rod
Magnetostrictive linear position sensors in rod design - List price USA	series - mobile
Mounting part	Mounting flange Ø 48 f7
Housing material	1.4404 stainless steel,
number max.	Magnets
Connection	1
Analog output	Leads, 0.19 m, ETFE
Measuring range	Analog, current 4...20 mA
Sampling frequency max.	716 mm
Resolution	1000 Hz
Repeat accuracy	Controller dependent (limited only by repeat accuracy)
Operating voltage Ub	± 5 µm
Ambient temperature	10...30 VDC
IP rating	-40...85 °C
	IP67

Approval/Conformity

CE, UKCA, WEEE - BALLUFF
USA

DANE TECHNICZNE

Nr kat.	OC-BALLUFF005006
---------	------------------

Data wygenerowania podsumowania: 07.08.2026r, g. 10:15