
Przetwornik położenia, magnetostrykcyjny, liniowy o podwyższonej odporności na warunki atmosferyczne, seria BTL (BTL2TY1) - Balluff

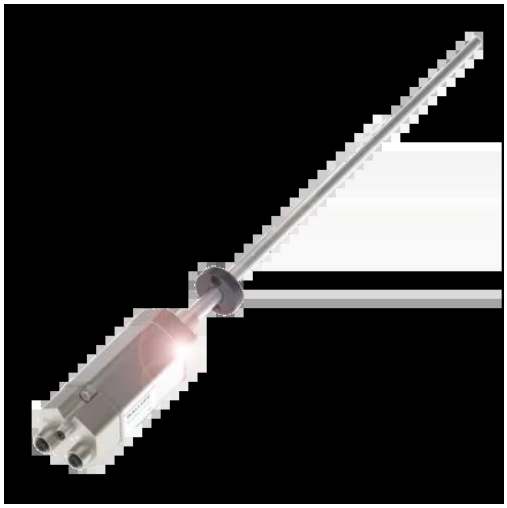

Numer artykułu SKU: OC-BALLUFF006617

Numer artykułu producenta: -----

Tylko na zamówienie

BALLUFF

OPIS PRODUKTU

Charakterystyka

BTL2TY1 (BTL7-V50E-M0622-Z-MB000-C003) - Magnetostrictive linear position sensors in rod design - List price USA	2,267.18 USD - Style: Rod series
Mounting part	Threaded flange 3/4-16UNF
Housing material	Aluminum, Anodized, Magnets
number max.	2
Connection	Connector, M8x1, 4-pin
Connection 1	M8x1, 4-pin
Connection 2	M12x1, 4-pin, D-coded
Connection 3	M12x1, 4-pin, D-coded
Interface	EtherCAT ETG.1000.4, ETG.1000.6
Measuring range	622 mm
Sampling frequency max.	780 Hz
Non-linearity max.	±30 µm
Repeat accuracy	≤ ± 5 µm (typ. ± 2.5 µm)
Operating voltage Ub	10...30 VDC
Ambient temperature	-40...85 °C

IP rating	IP67
Approval/Conformity	CE, UKCA, cULus, WEEE - BALLUFF USA

DANE TECHNICZNE

Nr kat.	OC-BALLUFF006617

Data wygenerowania podsumowania: 06.11.2026r, g. 00:26