
AIR-COM PNEUMATYKA-AUTOMATYKA

Najszersza oferta pneumatyki w Polsce

24h Szybka dostawa 24 h / 48 h

Biuro Obsługi Klienta +48 71 799 45 81

Przetwornik położenia, magnetostrykcyjny, liniowy o podwyższonej odporności na warunki atmosferyczne, seria BTL (BTL2KT6) - Balluff

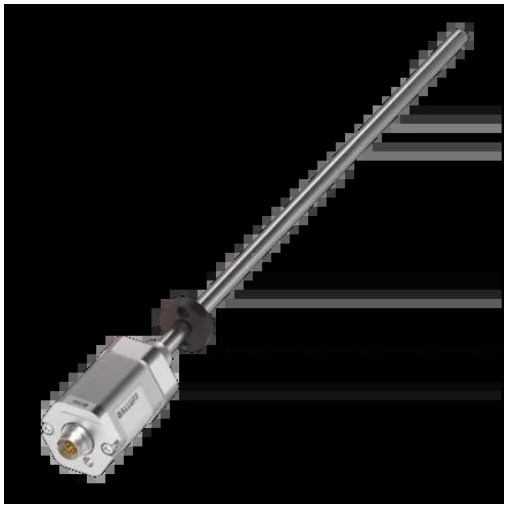

Numer artykułu SKU: OC-BALLUFF006112

Numer artykułu producenta: -----

Tylko na zamówienie

BALLUFF

OPIS PRODUKTU

Charakterystyka

BTL2KT6 (BTL7-P511-M2108-Z-SA442-S32) - Magnetostrictive linear position sensors in rod design - List price USA	2,288.90 USD - Style: Rod series
Mounting part	Threaded flange 3/4-16UNF
Housing material	Aluminum, Anodized
Connection	Connector, M16x0.75, 8-pin
Interface	Start/Stop;Start/Stop neg.
Measuring range	2108 mm
Sampling frequency max.	620 Hz
Non-linearity max.	±0.01 % FS
Repeat accuracy	≤ ± 5 µm (typ. ± 2.5 µm)
Operating voltage Ub	10...30 VDC
Ambient temperature	-40...85 °C
IP rating	IP67
Approval/Conformity	CE, UKCA, cULus, WEEE - BALLUFF USA

DANE TECHNICZNE

Nr kat.	OC-BALLUFF006112

Data wygenerowania podsumowania: 06.11.2026r, g. 03:36