
AIR-COM PNEUMATYKA-AUTOMATYKA

Najszersza oferta pneumatyki w Polsce

Szybka dostawa 24 h / 48 h

Biuro Obsługi Klienta +48 71 799 45 81

Przetwornik położenia, magnetostrykcyjny, liniowy o podwyższonej odporności na warunki atmosferyczne, seria BTL (BTL1JP4) - Balluff

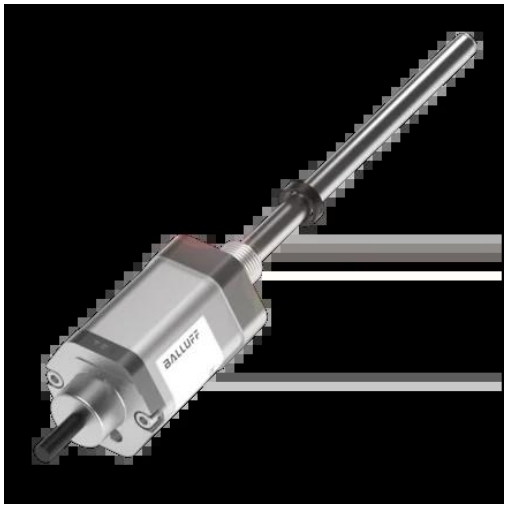

Numer artykułu SKU: OC-BALLUFF005888

Numer artykułu producenta: -----

Tylko na zamówienie

BALLUFF

OPIS PRODUKTU

Charakterystyka

BTL1JP4 (BTL7-P511-M0107-A-SA330-KA02) - Magnetostrictive linear position sensors in rod design - List price USA	1,488.20 USD - Style: Rod series
Mounting part	Threaded flange M18x1.5
Housing material	Aluminum, Anodized, Magnets
number max.	2
Connection	Cable, 2.00 m, PUR
Interface	Start/Stop;Start/Stop neg.
Measuring range	107 mm
Sampling frequency max.	4360 Hz
Non-linearity max.	±30 µm
Repeat accuracy	≤ ± 5 µm (typ. ± 2.5 µm)
Operating voltage Ub	10...30 VDC
Ambient temperature	-40...85 °C
IP rating	IP67
Approval/Conformity	CE, cULus, WEEE - BALLUFF USA

DANE TECHNICZNE

Nr kat.	OC-BALLUFF005888

Data wygenerowania podsumowania: 06.11.2026r, g. 03:36